



## Q.bloxx A127

Module for Measuring Electrical Power



The Q-series has been designed for demanding measurements found in today's most industrial measuring and testing environments. The range of applications starts from single stand-alone solutions up to networked multi-channel applications in the field of component testing, engine testing, process performance testing and structural monitoring.


The range and flexibility of the modules allows an optimized solution for each single task:

Dynamic signal acquisition up to 100 kHz, inputs and outputs for all types of signals, galvanic isolation of inputs and outputs, multi-channel solutions, high density packaging and intelligent signal conditioning.

Data exchange between Test Controller and automation level is communicated via Ethernet TCP/IP or fieldbus systems like EtherCAT or Profibus-DP and additional Ethernet-based industrial standards.

### Most important features:

- **4 voltage input channels**  
2 inputs for voltage measurement  
measuring ranges  $\pm 40\text{ V}$ ,  $\pm 120\text{ V}$ ,  $\pm 400\text{ V}$ ,  $\pm 1200\text{ V}$   
2 inputs for current measurement via shunt resistors  
measuring ranges  $\pm 80\text{ mV}$ ,  $\pm 240\text{ mV}$ ,  $\pm 800\text{ mV}$ ,  $\pm 2400\text{ mV}$
- **Fast high accuracy digitalization**  
24 bit ADC, 100 kHz sample rate each channel,
- **Signal conditioning**  
linearization, digital filter, average, scaling,  
minimum, maximum, RMS, alarm
- **RS485 fieldbus interface**  
up to 48 Mbps: LocalBus  
up to 115.2 kbps: Modbus-RTU, ASCII
- **Connectable to any Test Controller**  
e.g. Q.station, Qgate or Q.pac
- **Galvanic isolation**  
channel to channel to power supply and to interface  
isolation voltage 1200 VDC / 858 VACrms  
test voltage 5 kVDC over 1 minute
- **Electromagnetic Compatibility**  
according EN 61000-4 and EN 55011
- **Categories**  
1000 V CAT II and 600 V CAT III
- **Power supply 10...30 VDC**
- **DIN rail mounting (EN 60715)**

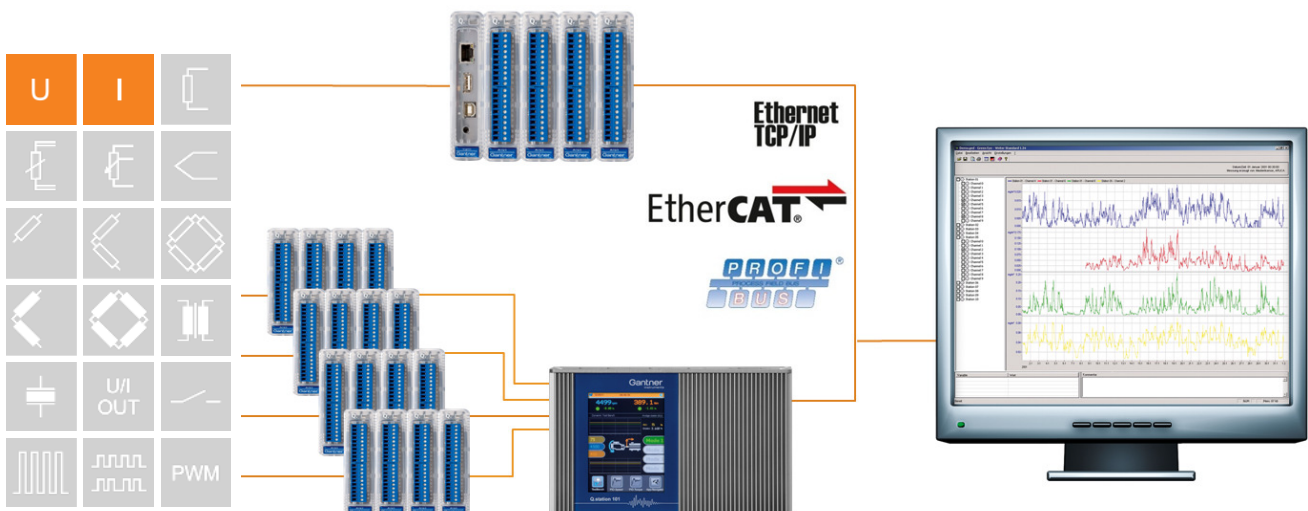




# Q.bloxx A127

## Module for Measuring Electrical Power

### Block Diagram

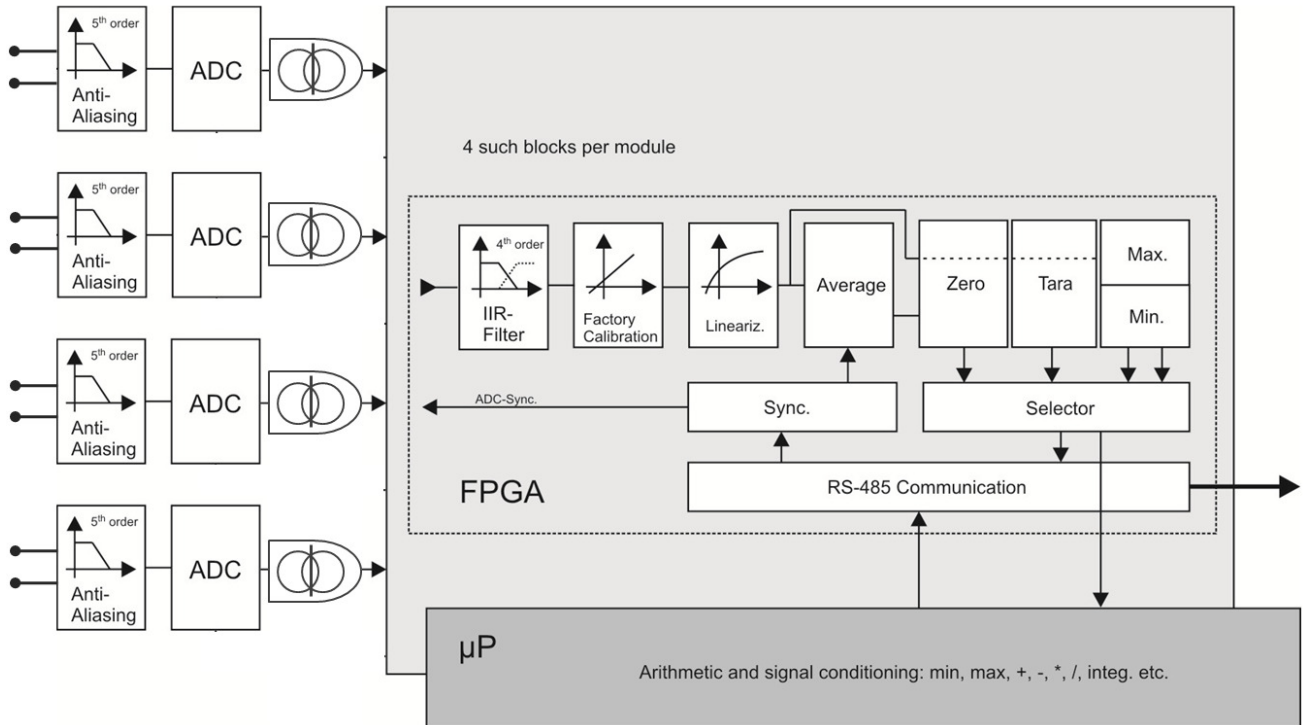

Analog Inputs			
Number	4		
Accuracy	0.01 % typical		
	0.025 % in controlled environment <sup>1</sup>		
	0.05 % in industrial area <sup>2</sup>		
Linearity error	0.01 % of the final value typical		
Repeatability	0.003 % typical (within 24 h)		
Isolation voltage	1200 VDC permanent, channel to channel to power supply to interface <sup>3</sup>		
Input resistance	>10 MΩ		
Signal-noise-ratio	> 100 dB at 100 Hz		
<b>Measurement Voltage</b>			
Channel 1 and 3	<b>Range</b>	<b>max. Deviation</b>	<b>Resolution</b>
	±1200 V	±300 mV	6 mV
	±400 V	±100 mV	2 mV
	±120 V	±30 mV	600 µV
	±40 V	±10 mV	200 µV
Long term drift	<10 mV / 24 h; <100 mV / 8000 h		
Temperature influence	on zero	on sensitivity	
	<50 mV / 10 K	<0.025 % / 10 K	

<sup>1</sup> according EN 61326: 2006, appendix B

<sup>2</sup> according EN 61326: 2006, appendix A

<sup>3</sup> High Voltage lifetime (TDDB E Model): Time to fail approx. 4 years at 1200 VDC and 60 °C permanent



## Q.bloxx A127

Module for Measuring Electrical Power

Measurement current via Shunt (internal on request) or Hall sensor Channel 2 and 4	Range	max. Deviation	Resolution
	±2400 mV	±600 µV	12 µV
	±800 mV	±200 µV	4 µV
	±240 mV	±60 µV	1.2 µV
	±80 mV	±20 µV	0.4 µV
Long term drift	<20 µV / 24 h; <200 µV / 8000 h		
Temperature influence	on zero	on sensitivity	
	<50 µV / 10 K	<0.02 % / 10 K	
<b>Analog/Digital-Conversion</b>			
Resolution	24 bit		
Sample rate	100 kHz each channel		
Conversion method	Sigma-Delta (group delay time 380 µs)		
Anti-aliasing filter	20 kHz, 3 <sup>rd</sup> order per channel		
Digital filter	IIR, low pass, high pass, band pass, 4 <sup>th</sup> order, 1 Hz up to 10 kHz in steps 1, 2, 5		
Averaging	configurable or automated according the selected data rate		
<b>Power Supply</b>			
Power supply	10 up to 30 VDC, overvoltage and overload protection		
Power consumption	approx. 2 W		
Influence of the voltage	<0.001 %/V		
<b>Environmental</b>			
Operating temperature	-20°C up to +60°C		
Storage temperature	-40°C up to +85°C		
Relative humidity	5 % up to 95 % at 50°C, non condensing		
<b>Communication Interface</b>			
Standard	RS-485, 2-wire		
Data format	8e1		
Protocols	Local-Bus: 115200 bps up to 48 Mbps		
	Modbus-RTU, ASCII: 19200 bps up to 115200 bps		
Connectable devices	max. 32		
<b>Mechanical</b>			
Case	Aluminum and ABS		
Dimensions (W x H x D)	(27 x 120 x 125) mm		
Weight	approx. 200 g		
Mounting	DIN EN-rail		



## Q.bloxx A127

Module for Measuring Electrical Power

---



### Warnings:

- Attention High voltage device, Danger for life and health in case of non-regular use.
- Only special and sufficient educated persons are permitted to handle this device only.
- All metal housing parts must be well and permanent connected to earth (PE).
- Only plugs and connectors with a sufficient protection against contact may be used. All parts must be approved and certificated up to 1200 VDC.
- During installation, the whole system must be without voltage and safely be disconnected from the mains.
- All relevant safety regulations have to be considered.

Base is the European Standard EN61010-1

The Q.bloxx EC module A123 can be used in the following categories:

1000 V CAT II

600 V CAT III

### Warm Up Time

All declarations are valid after a warm up time of 45 minutes.

Valid from July 2015. Specification subject to change without notice  
DB\_Q.bloxx\_A127\_E\_22.docx